



AUSTRALIA  
Maric Constant  
Flow Valves



# Product Data

## Wafer Type Valves


Brass

Gunmetal

PVC

Stainless Steel - Table D

Stainless Steel -ANSI/ASME

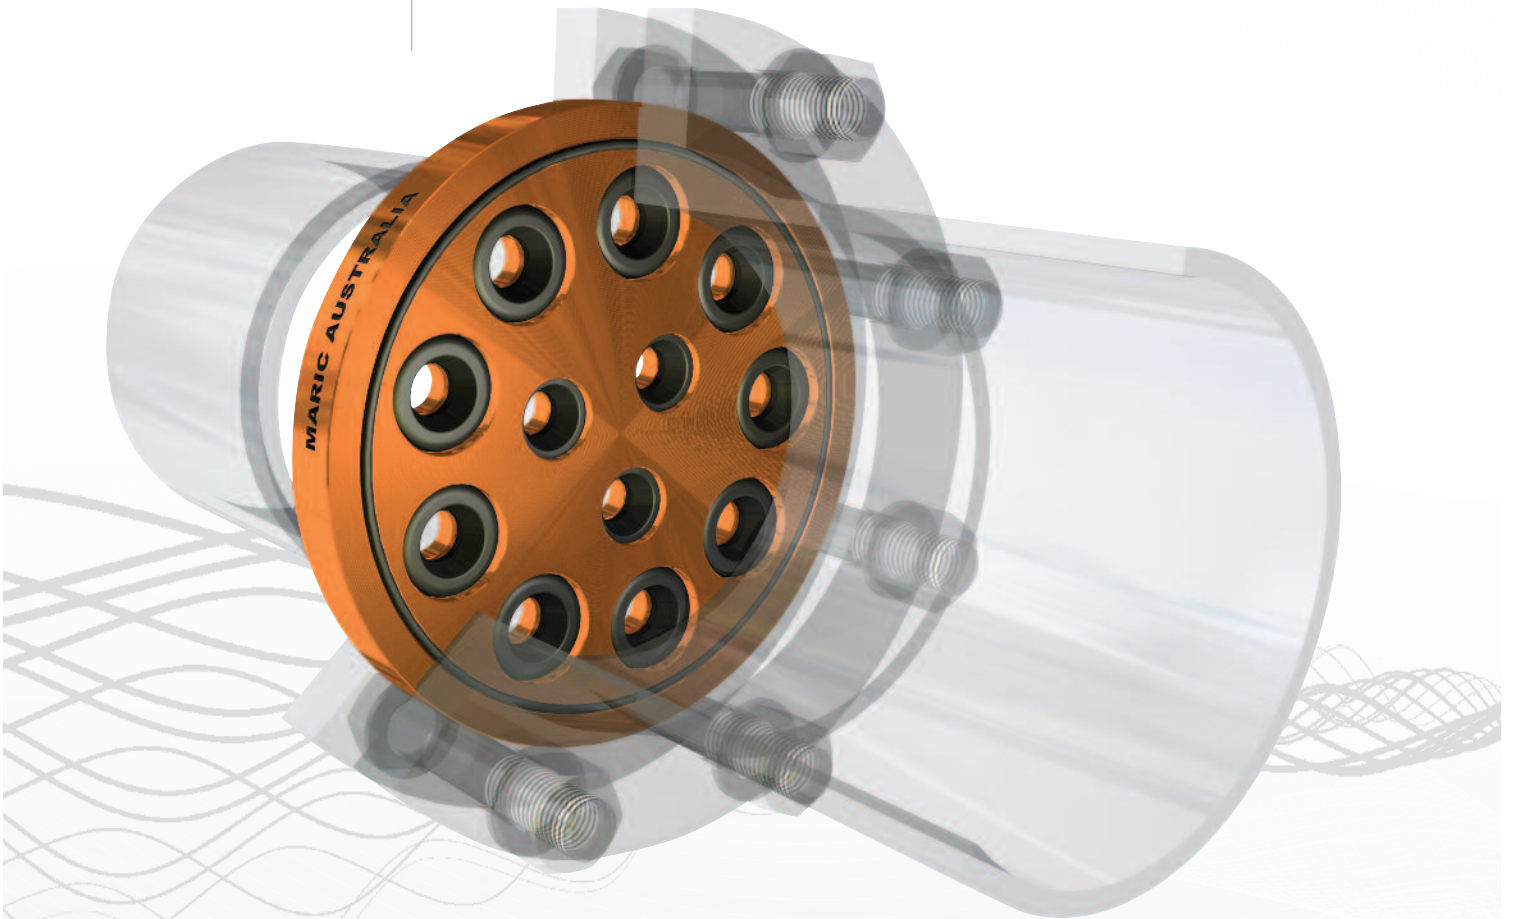

Exported  
Globally

[www.maric.com](http://www.maric.com)

V1022

Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

### Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
25mm	from 0.4 to 114 l/m	1
32mm	from 15 to 114 l/m	1
40mm	from 15 to 233 l/m	1
50mm	from 15 to 342 l/m	1 – 3



### Dimensions & Weights

Nominal size	25	32	40	50
Diameter	71.0	75.0	86.0	98.0
Thickness	22.0	22.0	22.0	22.0
Approx Weight Kg	0.6	0.8	0.9	1.2

### Standard Performance

**Pressure Differential Range**  
**Flow Rate Accuracy**  
**Headloss**  
**Available Flow Rates**

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa (Higher DP options available)

+/- 10%

140 kPa at rated flow. ( At lower than rated flows headloss reduces significantly. )

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.0 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 342 lpm

### Materials

**Body**  
**Sealing O’Rings**

“DR” Brass to AS1567 alloy 352

Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

### Quality & Construction

#### Flange Specification

Valves comply to WaterMark Technical Standards WMTS-037.1 and AS 4020

Suits standard table “D” flanges to AS2129 and AS4087 Class 14

Alternative specs are available - Refer to Valve Selection Guide for additional info.

Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.

PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

**Max Pressure Differential**  
**Max Hydrostatic Pressure**  
**Max Temperature**  
**Compatible Control Rubbers**

1500 kPa (for N6 and EP rubbers only)

6000 kPa

60°C for Nitrile control rubbers, 100°C for EPDM

Standard Precision P (Non Standard LP, N6, EP, K, V, HF)

### Specifying valves

*When ordering these valves, please be sure to specify;*

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com  
 Ph: +61 8 8431 2281



Maric Constant  
Flow Valves

Constant  
Flow Rate  
Regardless  
of Pressure



Est. 1963

## Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
50mm	from 15 to 342 l/m	1 – 3
65mm	from 15 to 456 l/m	4
80mm	from 15 to 699 l/m	3
100mm	from 15 to 1279 l/m	6
150mm	from 15 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 114 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



### Dimensions & Weights

Nominal size	50	65	80	100	150	200	250	300
Diameter	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	22.0	22.0	22.0	24.0	28.0	35.0	40.0	50.0
Approx Weight Kg	1.2	1.3	1.9	3.1	7.0	13.0	25.0	45.0

### Standard Performance

**Pressure Differential Range**  
**Flow Rate Accuracy**  
**Headloss**  
**Available Flow Rates**

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)  
 140 – 1000 kPa (Higher DP options available)  
 +/- 10%  
 140 kPa at rated flow. ( At lower than rated flows headloss reduces significantly. )  
 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

### Materials

**Body**  
**Sealing O’Rings**

LG2 or LG4 to BS1400  
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

### Flange Specification

Suits standard table “D” flanges to AS2129 and AS4087 Class 14  
 Alternative specs are available - Refer to Valve Selection Guide for additional info.  
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.  
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

**Max Pressure Differential**  
**Max Hydrostatic Pressure**  
**Max Temperature**  
**Compatible Control Rubbers**

1500 kPa (for N6 and EP rubbers only)  
 6000 kPa  
 60°C for Nitrile control rubbers, 100°C for EPDM  
 Standard Precision P (Non Standard LP, N6, EP, K, V, HF)

www.maric.com  
 Ph: +61 8 8431 2281

### Specifying valves

*When ordering these valves, please be sure to specify;*

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate



Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

### Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
25mm	from 0.4 to 114 l/m	1
32mm	from 15 to 114 l/m	1
40mm	from 15 to 233 l/m	1
50mm	from 15 to 342 l/m	1 – 3
65mm	from 15 to 456 l/m	4
80mm	from 15 to 699 l/m	3
100mm	from 15 to 1279 l/m	6
150mm	from 15 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 114 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



### Dimensions & Weights

Nominal size	25	32	40	50	65	80	100	150	200	250	300
Diameter	71.0	75.0	86.0	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	24.0	24.0	24.0	24.0	24.0	24.0	39.5	39.5	49.0	80.0	100.0
Approx Weight Kg	0.12	0.13	0.15	0.23	0.24	0.37	0.93	1.0	2.7	9.0	13.0

### Standard Performance

**Pressure Differential Range**  
**Flow Rate Accuracy**  
**Headloss**  
**Available Flow Rates**

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa  
 +/- 10%  
 140 kPa at rated flow. ( At lower than rated flows headloss reduces significantly. )  
 .4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 3.0 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

**Materials**      **Body**  
                          **Sealing O’Rings**

Grey UPVC, Special grade to suit potable water requirements to AS4020  
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

**Quality & Construction**  
**Flange Specification**

Valves comply to WaterMark Technical Standards WMTS-037.1 and AS 4020  
 Suits standard table “D” flanges to AS2129 and AS4087 Class 14  
 Alternative specs are available - Refer to Valve Selection Guide for additional info.  
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.  
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

**Max Pressure Differential**  
**Max Hydrostatic Pressure**  
**Max Temperature**  
**Compatible Control Rubbers**

1000 kPa or limited by Control Rubber type  
 3000 kPa  
 50°C  
 Standard Precision P (Non Standard LP, EP, K, V, HF)

### Specifying valves

*When ordering these valves, please be sure to specify;*

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com  
 Ph: +61 8 8431 2281



Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

## Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
25mm	from 0.4 to 114 l/m	1
32mm	from 15 to 114 l/m	1
40mm	from 15 to 233 l/m	1
50mm	from 15 to 342 l/m	1 – 3
65mm	from 15 to 456 l/m	4
80mm	from 15 to 699 l/m	3
100mm	from 15 to 1279 l/m	6
150mm	from 15 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 114 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



## Dimensions & Weights

Nominal size	25	32	40	50	65	80	100	150	200	250	300
Diameter	71.0	75.0	86.0	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	22.0	22.0	22.0	22.0	22.0	22.0	24.0	24.0	28.0	32.0	40.0
Approx Weight Kg	0.6	0.7	0.9	1.2	1.2	1.6	2.7	5.0	11.0	19.0	31.0

## Standard Performance

**Pressure Differential Range**  
**Flow Rate Accuracy**  
**Headloss**  
**Available Flow Rates**

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa (Higher DP options available)

+/- 10%

140 kPa at rated flow. ( At lower than rated flows headloss reduces significantly. )

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.0 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

## Materials

**Body**  
**Sealing O’Rings**

316 Stainless Steel to ASTM484/A276  
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

## Flange Specification

Suits standard table “D” flanges to AS2129 and AS4087 Class 14  
 Alternative specs are available - Refer to Valve Selection Guide for additional info.  
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.  
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

**Max Pressure Differential**  
**Max Hydrostatic Pressure**  
**Max Temperature**  
**Compatible Control Rubbers**

2000 kPa (for N7 & E7 rubbers only)  
 6000 kPa  
 60°C for Nitrile control Rubbers - 100°C for EPDM - 200°C for Viton  
 Standard Precision P (Non Standard LP, N6, N7, EP, E7, V, HF)

## Specifying valves

*When ordering these valves, please be sure to specify;*

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com  
 Ph: +61 8 8431 2281



Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

## Availability & Specifications – Maric Flow Control Valves

Designed for mounting between ANSI 150 and ANSI 300 pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
25mm	from 0.4 to 114 l/m	1
32mm	from 15 to 114 l/m	1
40mm	from 15 to 233 l/m	1
50mm	from 15 to 342 l/m	1 – 3
65mm	from 15 to 456 l/m	4
80mm	from 15 to 699 l/m	3
100mm	from 15 to 1279 l/m	6
150mm	from 15 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 114 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



## Dimensions & Weights

Nominal size	25	32	40	50	65	80	100	150	200	250	300
Diameter - ANSI150	66.6	76.2	86.0	104.8	123.9	136.6	174.7	222.3	279.4	339.7	409.6
Diameter - ANSI 300	73.1	82.6	95.3	111.2	130.2	149.2	181.0	250.8	308.0	361.9	422.3
Thickness	22.0	22.0	22.0	22.0	22.0	22.0	24.0	24.0	28.0	32.0	40.0
Approx Weight Kg	0.6	0.7	0.9	1.2	1.2	1.6	2.7	5.0	11.0	19.0	31.0

## Standard Performance

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

**Pressure Differential Range**  
**Flow Rate Accuracy**  
**Headloss**  
**Available Flow Rates**

140 – 1000 kPa  
 +/- 10%  
 140 kPa at rated flow. ( At lower than rated flows headloss reduces significantly. )  
 .4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.0 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

## Materials

**Body**  
**Sealing O’Rings**

316 Stainless Steel to ASTM484/A276  
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

## Flange Specification

Suits ANSI flanges (ASME/ANSI B16.5)  
 Alternative specs are available - *Refer to Valve Selection Guide.*  
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly.  
 Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.  
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

**Max Pressure Differential**  
**Max Hydrostatic Pressure**  
**Max Temperature**  
**Compatible Control Rubbers**

2000 kPa (for N7 & E7 rubbers Only)  
 6000 kPa  
 60°C for Nitrile control rubbers - 100°C for EPDM - 200°C for Viton  
 Standard Precision P (Non Standard LP, N6, N7, EP, E7, V, HF)

## Specifying valves

*When ordering these valves, please be sure to specify;*

- Body size
- Flange specification (ANSI 150 or otherwise)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com  
 Ph: +61 8 8431 2281

